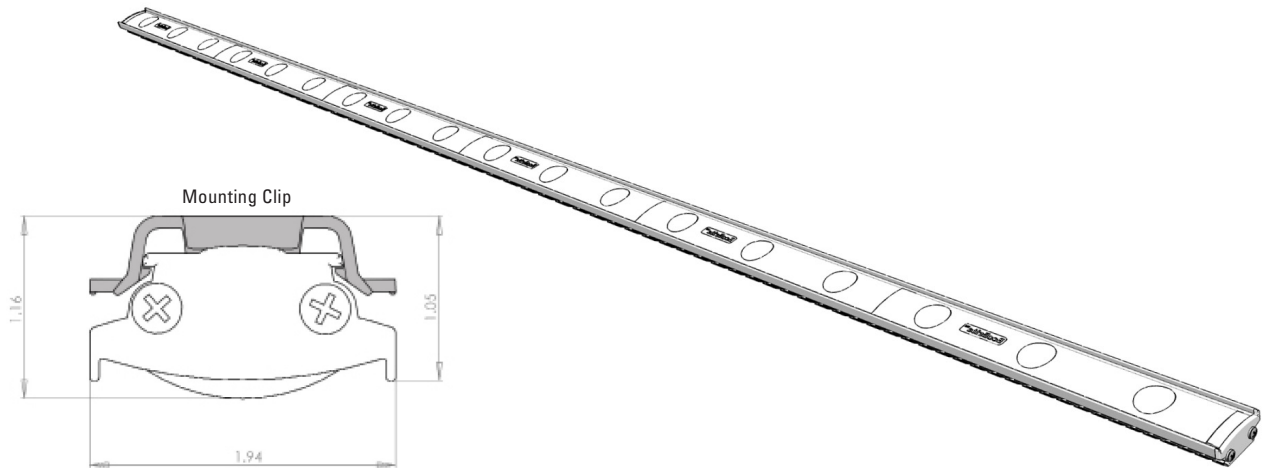


R-SERIES**740/760**

WALK-IN COOLER OVERHEAD LIGHTING

The R-Series LED overhead lights utilize patented Precision Optical Performance technology for efficient light distribution. The R-series works great on new OEM cases or as a seamless retrofit of the existing fluorescent lighting.

PRODUCT DETAILS

Intended Use

The R-Series LED overhead lights are designed for new OEM cases or retrofit projects.

Construction & Materials

High quality aluminum rail incorporating heat sink technology. Shatter proof optics. High impact resistant mounting clips.

Optical System

Patented Precision Optical Performance® (P.O.P.) technology. Several different wide and narrow light distribution options available.

Electrical System

Class 2 low voltage power supply; Input voltage 120V-277V

Installation

Quick and easy installation using the provided mounting clips.

Listings

UL Listed
RoHS Compliant
NSF Listed
DLC Qualified

Warranty

The R-Series LED lighting products come with a five year warranty for parts manufactured and furnished by Innovative Lighting, LLC. Standard terms and conditions apply.




SPEC INFORMATION


Part Number	Number of LEDs	CRI (nominal)	Color temperature	Efficacy	Average L70 Life (hrs)	Dimensions	Input Weight	Energy (Watts)	Lumens (typical)
740-5226-1	18	72	5650 K	60.9 lm/W	80,000	68.8"L 1.94"W 1.2"D	3.4 lbs	37.6	2290
740-5224-1	12	72	5650 K	61.4 lm/W	80,000	46.25"L 1.94"W 1.2"D	2.3 lbs	22.1	1350
760-5072-1	18	70	4100 K	57 lm/W	80,000	68.8"L 1.94"W 1.2"D	3.4 lbs	33.7	1920
760-5060-1 ¹	15	70	4100 K	56 lm/W	80,000	57.5"L 1.94"W 1.2"D	2.9 lbs	28.3	1600
760-5048-1	12	70	4100 K	52.5 lm/W	80,000	46.25"L 1.94"W 1.2"D	2.3 lbs	22.6	1190

1: Estimated Values

PART NUMBER INFORMATION

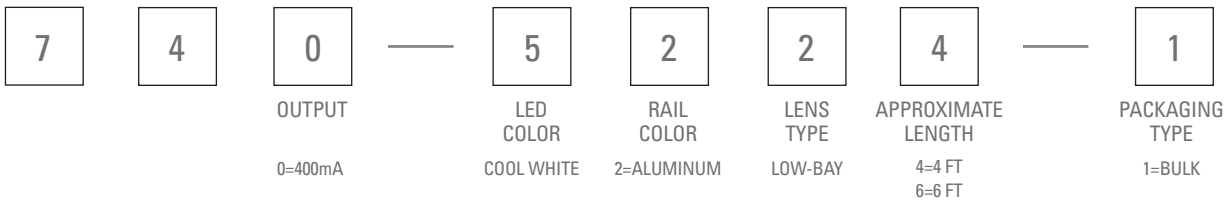

PART NUMBER INFORMATION

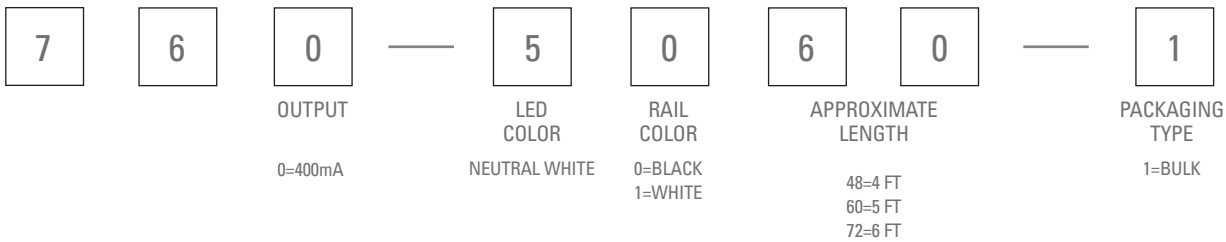


Notes:

•Cool White is 5650K, Neutral White is 4100K


*760-5072-1, 760-5060-1, 760-5048-1 are DLC qualified for a 120V input voltage



Power Supply
Regulated Class 2 60W/12V
750-9995-1



Mounting Clip
750-9911-1



15° Shim
750-9911-1

