

SMOOTH LIGHT

A-SERIES

785

OFFICE LIGHTING

The Smooth Light A-Series LED lighting products provide all the benefits of LED lighting with the look of fluorescent tubes. Using Mid-Power LEDs spaced closer together the Smooth Light A-Series provides an even light output in any installation application.

PRODUCT DETAILS

Intended Use

The Smooth Light A-Series LED fixtures are designed for new construction or retro-fit projects.

Construction & Materials

All aluminum construction for troffer housing minimizes fixture weight.

Optical System

Aluminum shell includes 92% reflective white enamel. Linear ribbed lens and optical liner included.

Electrical System

Class 2 low voltage LED driver; Input voltage 120V-277V

Installation

Quick and easy installation.

Recommended Uses

Office Areas
Front Entry Ways
Hallways
Classrooms

Listings

RoHS Compliant
ETL Listed
DLC Qualified
LED Lighting Facts Approved

Warranty


Smooth Light products come with a 10 year warranty for parts manufactured and furnished by Innovative Lighting, LLC. Standard terms and conditions apply.



SPEC INFORMATION

Part Number	Number of LEDs	CRI (nominal)	CCT (nominal)	Efficacy	Average L70 Life (hrs)	Dimensions	Weight	Energy (Watts)	Lumens (typical)
785-5214-4-2A	140	85.4	5000 K	97 lm/W	120,000	47.750"L 23.750"W 3.500"D	7.5 lbs	33.5W	3240
785-5212-4-2A	70	86.3	5000 K	93 lm/W	120,000	23.750"L 23.750"W 3.500"D	4.5 lbs	17.1W	1580
785-6214-4-2A	140	86.1	4000 K	86 lm/W	120,000	47.750"L 23.750"W 3.500"D	7.5 lbs	33.3	2862
785-6212-4-2A	70	84.6	4000 K	85 lm/W	120,000	23.750"L 23.750"W 3.500"D	4.5 lbs	16.2	1370
785-0214-4-2A	140	83.4	3500 K	86 lm/W	120,000	47.750"L 23.750"W 3.500"D	7.5 lbs	33.0W	2835
785-0212-4-2A	70	83.2	3500 K	82 lm/W	120,000	23.750"L 23.750"W 3.500"D	4.5 lbs	17.2W	1420

PRODUCT DIAGRAMS

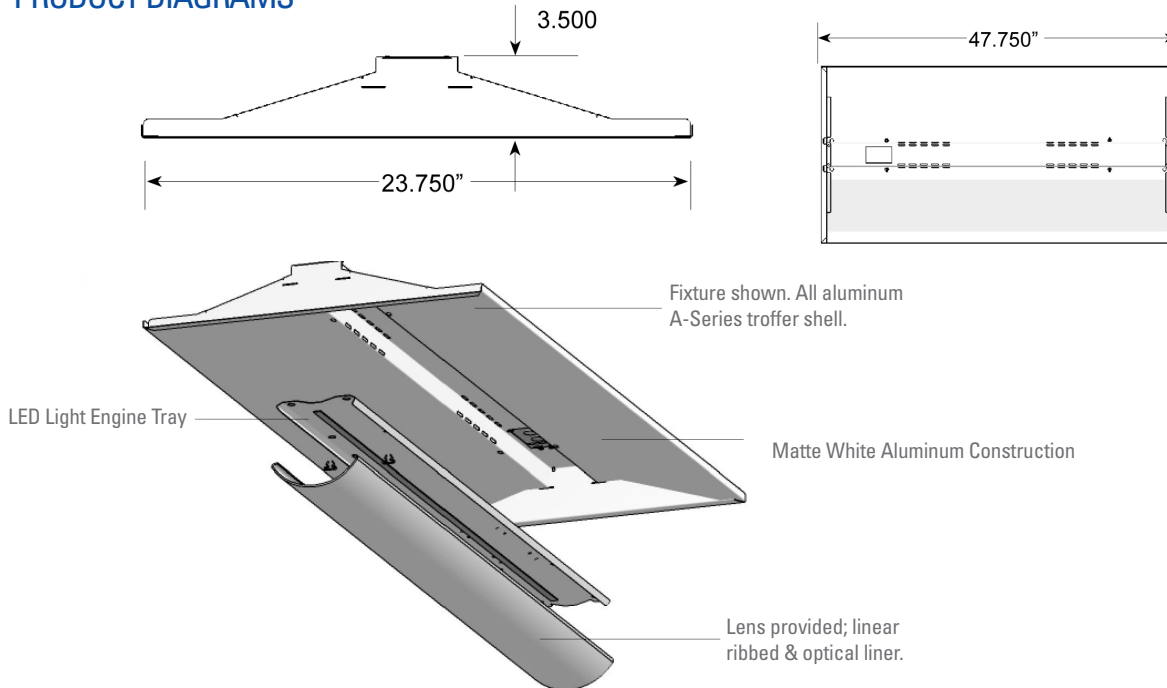

Notes:

* The following products are DLC Qualified for 120V input: 785-5214-4-2A AND 785-0214-4-2A.

PART NUMBER INFORMATION

