

The IP65 Rated Vapor Tight fixture provides LED brightness and efficiency in the harshest of environments.

Perfect for car washes, stairwells, airports, tunnels, maintenance areas, parking garages, and more.

Included mounting hardware for surface mount.

Optional suspension mounting available.



Surface Mounting ▶ hardware is included.



Suspension Mounting ▶ hardware is optional.



## PRODUCT DETAILS

### Intended Use

The IP65 rated LED Fixture is meant to illuminate any area where moisture or airborne particles are present.

### Construction & Materials

High quality aircraft aluminum rail incorporating heat sink technology greatly increases fixture life.

### Optical System

PCB Cover keeps lights bright but protected from environment.

Electrical System  
100-277VAC

### Installation

Quick and easy installation. Comes with surface mounting hardware. Suspension mounting hardware is optional.

### Listings

UL Listed  
DLC Qualified  
RoHS Compliant  
NSF Listed


### Warranty

Vapor Tight LED lighting products come with a five year warranty for parts manufactured and furnished by Innovative Lighting, LLC. Standard terms and conditions apply.


Part Number	Mfg. Part #	Description	Size	Wattage	Color	Life (Hours)	Wty (Yrs)	Lumens	Ballast	DLC/ES #
U-TP4FT45WNA	AL-TP45W50K4FTID&	Standard (4)	4'	45W	5000K	50,000	5	5500	N	PSHSDHMK
U-TP4FT45WNA PC9	AL-TP45W50K4FTID&	Daisy-Chain	4'	45W	5000K	50,000	5	5500	N	
U-TP4FT45WNAS	AL-TP45W50K4FTID&	Seamless	4'	45W	5000K	50,000	5	5500	N	
U-TP4FT45WNA-2	AL-TP45W50K4FTID&	NSF Version	4'	45W	5000K	50,000	5	5500	N	
U-TP8FT70WANA	AL-TP70W50K8FTID&	Standard (8)	8'	70W	5000K	50,000	5	8945	N	P3GRDB55
U-HANGINGKIT	AL-TP45W50K4FTID&	Optional Suspension Mount								

## MOUNTING OPTIONS


### Standard & NSF Version

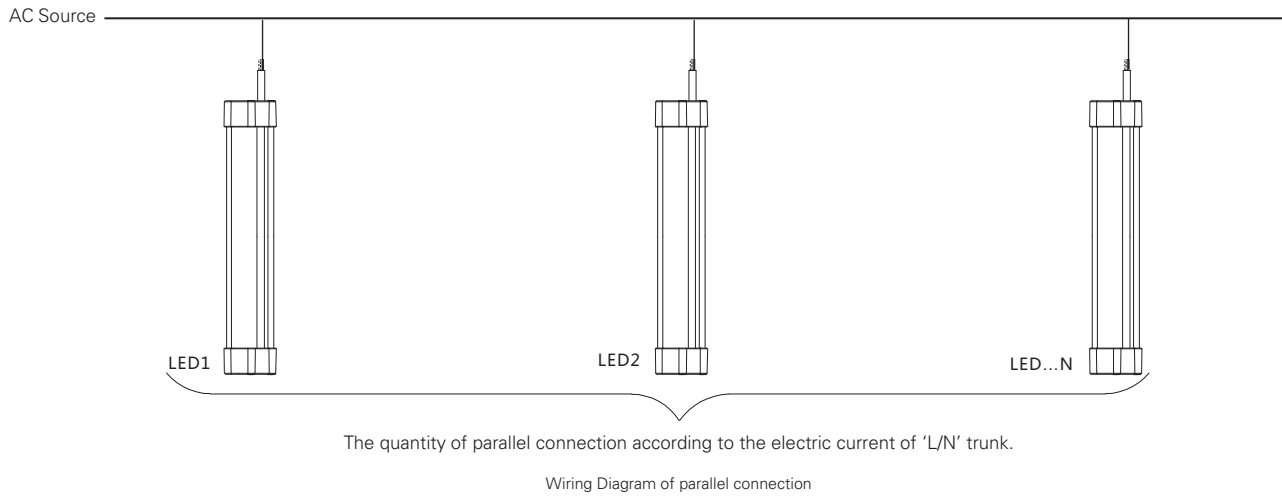


### Seamless

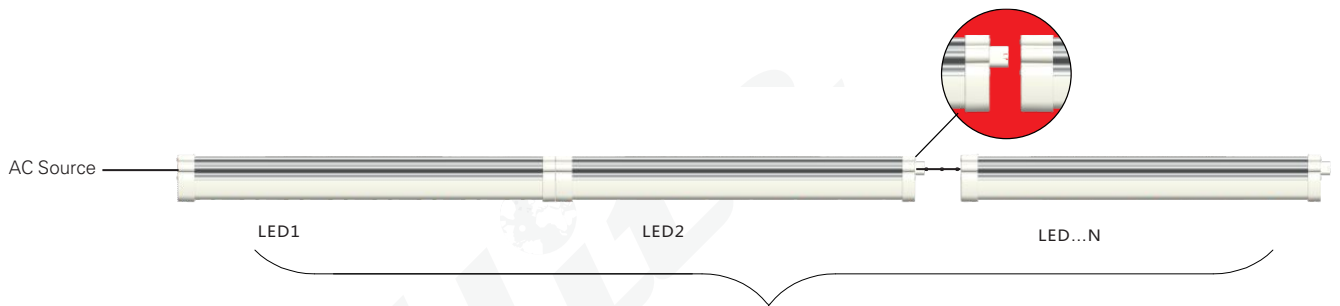

- 120 volt AC - 8 fixtures can be connected in sequence
- 277 volt AC - 22 fixtures can be connected in sequence



### Daisy Chain



- 120 volt AC - 8 fixtures can be connected in sequence
- 277 volt AC - 22 fixtures can be connected in sequence

